
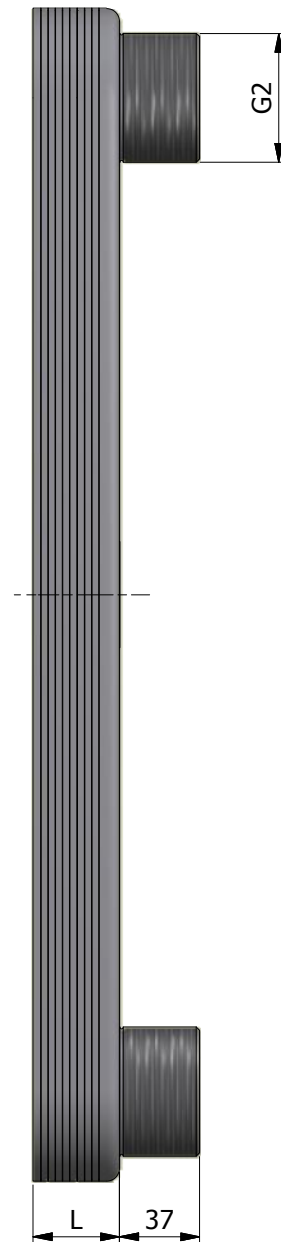


Max. arbejdstryk / Max. working pressure: 30 bar
 Max arbejdstemperatur / Max working temperature: 195 °C

Pladeantal / No. of plates	n
Dimension L (mm)	11,5 + 2,65 x n
Tomvægt / Empty weight (kg)	13,2 + 0,5 x n
Areal / Area (m ²)	0,16 x n

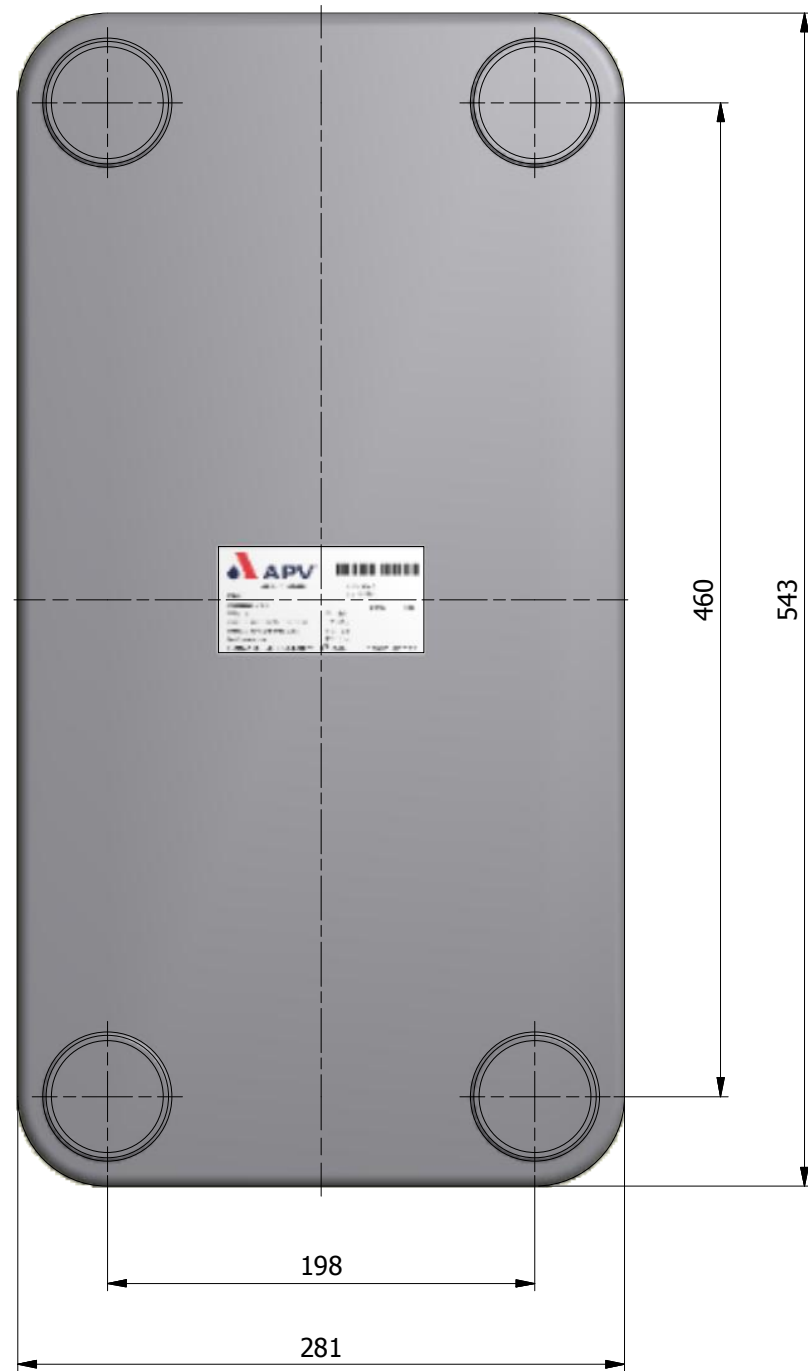

SPX Flow Technology Danmark A/S
 Platinvej 8, 6000 Kolding, Denmark
 Tel.: +45 70 278 444
 Fax: +45 70 278 445
 www.SPXFT.com

Weight kg:

Drawn:
 07-01-2013 HeM

Approved:
 07-01-2013 cmc

Sheet no:
 1


Archive:
 C:\Working Folder\Designs\Brazed\SPX_UNEX\lpt_lam\TTG45.lam

Material:

PARABRAZED TTG45

APV®

Basis no.:



Drawing no.:
 TTG45

Rev.
 0