


Max. arbejdsdruk / Max. working pressure: 30 bar  
 Max arbejdstemperatur / Max working temperature: 195 °C

Pladeantal / No. of plates	n
Dimension L (mm)	9 + 2,3 x n
Tomvægt / Empty weight (kg)	1,69 + 0,12 x n
Areal / Area (m <sup>2</sup> )	0,045 x n

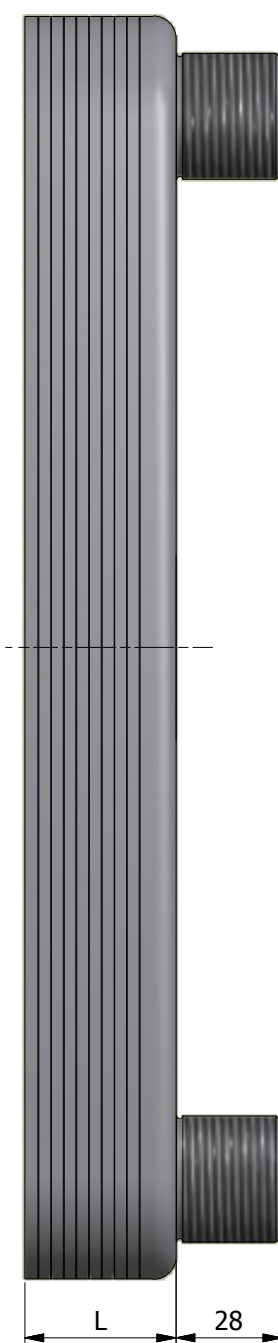

<b>SPX Flow Technology Danmark A/S</b> Platinvej 8, 6000 Kolding, Denmark Tel.: +45 70 278 444 Fax: +45 70 278 445 www.SPXFt.com		<b>PARABRAZED TTU11</b>			
Weight kg:				Basis no.:	
Drawn: 05-12-2012      HeM					
Approved: 05-12-2012      cmc					
Sheet no:	1	Archive:	C:\Working Folder\Designs\Brazed\SPX_UNEX\lpt_lam\TTU11.iam		Material:
				Drawing no.:	Rev.:
				TTU11	0