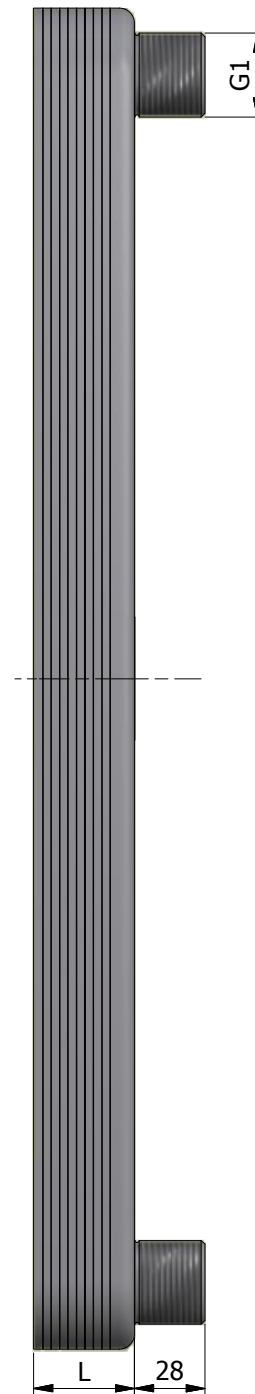
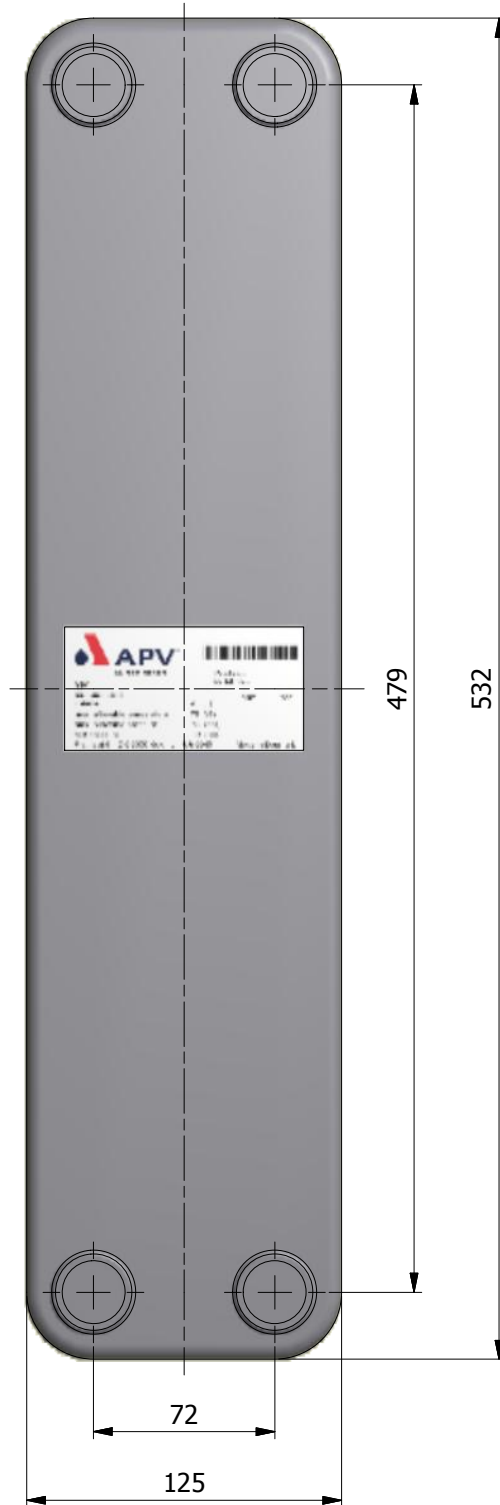




Max. arbejdstryk / Max. working pressure: 30 bar
 Max arbejdstemperatur / Max working temperature: 195 °C

| | |
|--------------------------------|----------------|
| Pladeantal / No. of plates | n |
| Dimension L (mm) | 9 + 2,3 x n |
| Tomvægt / Empty weight (kg) | 2,45 + 0,2 x n |
| Areal / Area (m ²) | 0,058 x n |



| | | | | |
|--|---|-------------------------|---|------------|
| SPX Flow Technology Danmark A/S Platinvej 8, 6000 Kolding, Denmark Tel.: +45 70 278 444 Fax: +45 70 278 445 www.SPXFT.com | | PARABRAZED TTU20 |  | |
| Weight kg: | | | Basis no.: | |
| Drawn: 07-01-2013 | HeM | |  | |
| Approved: 07-01-2013 | cmc | | | |
| Sheet no: 1 | Archive: <small>C:\Working Folder\Designs\Braze\SPX_UNEX\lpt_lam\TTU20.lam</small> | Material: | Drawing no.: TTU20 | Rev.: 0 |